

## Plug-in Signal Conditioners M-UNIT


### ANALOG ADDER

#### Functions & Features

- Accepting two DC inputs and providing a standard process signal proportional to the addition of the two signals
- Isolation up to 2000 V AC
- LCD meter indicates added values (engineering unit display selectable)
- Simple loop test output (0 % and 100 %)
- High-density mounting

#### Typical Applications

- Adding two flows
- DC input transmitter for a power installation (dielectric strength 2000 V AC, 110 V DC power)



## MODEL: ADS-[1][2]-[3][4]

### ORDERING INFORMATION

- Code number: ADS-[1][2]-[3][4]
- Specify a code from below for each of [1] through [4].  
(e.g. ADS-6A-B/E2/Q)
- Special input and output ranges (For codes Z & 0)
- Parameters (e.g.  $K_1 = 0.10$ ,  $K_2 = 2.00$ )
- Specify the specification for option code /Q  
(e.g. /C01/S01)

### [1] INPUT

#### Current

- A: 4 – 20 mA DC (Input resistance 250  $\Omega$ )  
 A1: 4 – 20 mA DC (Input resistance 50  $\Omega$ )  
 B: 2 – 10 mA DC (Input resistance 500  $\Omega$ )  
 C: 1 – 5 mA DC (Input resistance 1000  $\Omega$ )  
 D: 0 – 20 mA DC (Input resistance 50  $\Omega$ )  
 E: 0 – 16 mA DC (Input resistance 62.5  $\Omega$ )  
 F: 0 – 10 mA DC (Input resistance 100  $\Omega$ )  
 G: 0 – 1 mA DC (Input resistance 1000  $\Omega$ )  
 H: 10 – 50 mA DC (Input resistance 100  $\Omega$ )  
 J: 0 – 10  $\mu$ A DC (Input resistance 1000  $\Omega$ )

- K: 0 – 100  $\mu$ A DC (Input resistance 1000  $\Omega$ )  
 GW: -1 – +1 mA DC (Input resistance 1000  $\Omega$ )  
 FW: -10 – +10 mA DC (Input resistance 100  $\Omega$ )  
 Z: Specify current (See INPUT SPECIFICATIONS)

#### Voltage

- 1: 0 – 10 mV DC (Input resistance 10 k $\Omega$  min.)  
 15: 0 – 50 mV DC (Input resistance 10 k $\Omega$  min.)  
 16: 0 – 60 mV DC (Input resistance 10 k $\Omega$  min.)  
 2: 0 – 100 mV DC (Input resistance 100 k $\Omega$  min.)  
 3: 0 – 1 V DC (Input resistance 1 M $\Omega$  min.)  
 4: 0 – 10 V DC (Input resistance 1 M $\Omega$  min.)  
 5: 0 – 5 V DC (Input resistance 1 M $\Omega$  min.)  
 6: 1 – 5 V DC (Input resistance 1 M $\Omega$  min.)  
 4W: -10 – +10 V DC (Input resistance 1 M $\Omega$  min.)  
 5W: -5 – +5 V DC (Input resistance 1 M $\Omega$  min.)  
 0: Specify voltage (See INPUT SPECIFICATIONS)

### [2] OUTPUT

#### Current

- A: 4 – 20 mA DC (Load resistance 750  $\Omega$  max.)  
 B: 2 – 10 mA DC (Load resistance 1500  $\Omega$  max.)  
 C: 1 – 5 mA DC (Load resistance 3000  $\Omega$  max.)  
 D: 0 – 20 mA DC (Load resistance 750  $\Omega$  max.)  
 E: 0 – 16 mA DC (Load resistance 900  $\Omega$  max.)  
 F: 0 – 10 mA DC (Load resistance 1500  $\Omega$  max.)  
 G: 0 – 1 mA DC (Load resistance 15 k $\Omega$  max.)  
 Z: Specify current (See OUTPUT SPECIFICATIONS)

#### Voltage

- 1: 0 – 10 mV DC (Load resistance 10 k $\Omega$  min.)  
 2: 0 – 100 mV DC (Load resistance 100 k $\Omega$  min.)  
 3: 0 – 1 V DC (Load resistance 100  $\Omega$  min.)  
 4: 0 – 10 V DC (Load resistance 1000  $\Omega$  min.)  
 5: 0 – 5 V DC (Load resistance 500  $\Omega$  min.)  
 6: 1 – 5 V DC (Load resistance 500  $\Omega$  min.)  
 4W: -10 – +10 V DC (Load resistance 2000  $\Omega$  min.)  
 5W: -5 – +5 V DC (Load resistance 1000  $\Omega$  min.)  
 0: Specify voltage (See OUTPUT SPECIFICATIONS)

### [3] POWER INPUT

#### AC Power

- B: 100 V AC  
 C: 110 V AC  
 D: 115 V AC  
 F: 120 V AC  
 G: 200 V AC  
 H: 220 V AC  
 J: 240 V AC

#### DC Power

- S: 12 V DC  
 R: 24 V DC  
 V: 48 V DC

P: 110 V DC (Not selectable with Option /E2)

## [4] OPTIONS (multiple selections)

### Addition Indicator

blank: Without

/E: With (0.0 - 100.0 % display)

/E2: With (in engineering unit with backlight and the simple loop test output)

### Other Options

blank: none

/Q: Option other than the above (specify the specification)

## SPECIFICATIONS OF OPTION: Q (multiple selections)

### COATING (For the detail, refer to M-System's web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

### TERMINAL SCREW MATERIAL

/S01: Stainless steel

## GENERAL SPECIFICATIONS

Construction: Plug-in

Connection: M3.5 screw terminals

Screw terminal: Chromated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)

Isolation: Input 1 or input 2 to output to power

Overrange output: Approx. -10 to +120 % at 1 - 5 V

Zero adjustment: -5 to +5 % (front)

Span adjustment: 95 to 105 % (front)

Equation: Output =  $K_1 \times \text{Input 1} + K_2 \times \text{Input 2}$

$K_1, K_2$ : 0.10 - 2.00 (parameters)

Output, Input 1, Input 2: 0 - 100 %

$K_1, K_2$  are ex-factory specified.

Note: Be aware that a input signal less than 0 % is calculated as a minus signal.

Simple loop test output: 0 % and 100 % signal simulated by selecting the front switch positions. (Only for option code /E2)

### ■ DISPLAY (Added values indicator)

• Option code: /E

LCD digital display: 0.0 - 100.0 % (min. digit 0.1 %)  
(No scaling)

• Option code: /E2

LCD digital display: Engineering unit

Display scaling: -10000 - +10000

Decimal position:  $10^{-1}$  -  $10^{-4}$  or no decimal point

Engineering unit: %,  $\mu\text{V}$ , mV, V, mA, A, °C, °F,  $\Omega$ , DEG K, mHz, Hz, kHz, VAC, AAC, mg, g, kg, t, rpm or rps selectable

Back light: Green at normal, red at loop test output enable

Factory setting: scaling 0.00 - 100.00, unit: %

## INPUT SPECIFICATIONS

### ■ DC Current:

Shunt resistor attached to the input terminals (0.5 W)

Specify input resistance value for code Z.

### ■ DC Voltage: -300 - +300 V DC

Minimum span: 3 mV

Offset: Max. 1.5 times span

### Input resistance

Span 3 - 10 mV :  $\geq 10 \text{ k}\Omega$

Span 10 - 100 mV :  $\geq 10 \text{ k}\Omega$

Span 0.1 - 1 V :  $\geq 100 \text{ k}\Omega$

Span  $\geq 1 \text{ V}$  :  $\geq 1 \text{ M}\Omega$

## OUTPUT SPECIFICATIONS

### ■ DC Current: 0 - 20 mA DC

Minimum span: 1 mA

Offset: Max. 1.5 times span

Load resistance: Output drive 15 V max.

### ■ DC Voltage: -10 - +12 V DC

Minimum span: 5 mV

Offset: Max. 1.5 times span

Load resistance: Output drive 10 mA max.; 5 mA for negative voltage output; at  $\geq 0.5 \text{ V}$

## INSTALLATION

### Power input

• AC: Operational voltage range: rating  $\pm 10 \%$ , 50/60  $\pm 2 \text{ Hz}$ , approx. 2 VA

(approx. 3 VA with Option /E2)

• DC: Operational voltage range: rating  $\pm 10 \%$ , or 85 - 150 V for 110 V rating (ripple 10 % p-p max.) approx. 2 W (80 mA at 24 V; approx. 3 W with Option /E2)

Operating temperature: -5 to +60°C (23 to 140°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 400 g (0.88 lb)

## PERFORMANCE in percentage of span

Accuracy:  $\pm 0.2 \%$  ( $\pm 0.4 \%$  at  $K_1$  and/or  $K_2 > 1.00$ )

Display accuracy:  $\pm (0.2 \%$  of FS + 1 digit)

$\pm (0.4 \%$  of FS + 1 digit) at  $K_1$  and/or  $K_2 > 1.00$

Simple loop test output setting accuracy:  $\pm 0.5 \%$

Temp. coefficient:  $\pm 0.015 \%/^{\circ}\text{C}$  ( $\pm 0.008 \%/^{\circ}\text{F}$ )

Response time:  $\leq 0.5 \text{ sec.}$  (0 - 90 %)

Line voltage effect:  $\pm 0.1 \%$  over voltage range



Insulation resistance:  $\geq 100 \text{ M}\Omega$  with 500 V DC

Dielectric strength: 2000 V AC @1 minute (input 1 or input 2 to output to power to ground)


EXTERNAL VIEW

■ OPTION /E

■ OPTION /E2

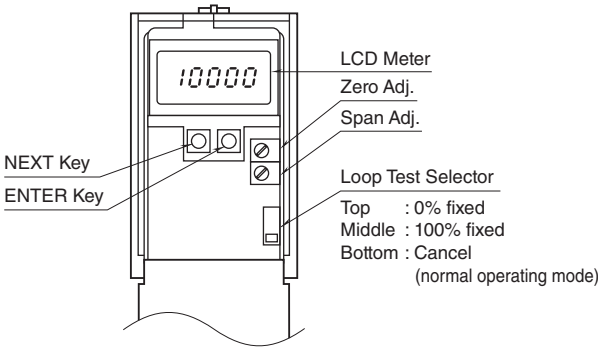


EXTERNAL DIMENSIONS unit: mm (inch)

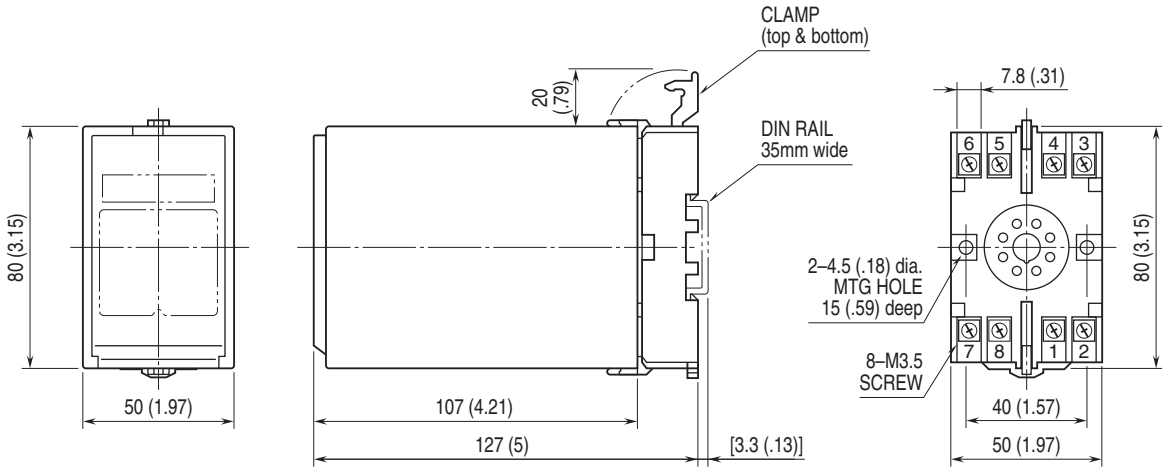


• When mounting, no extra space is needed between units.

TERMINAL ASSIGNMENTS unit: mm (inch)

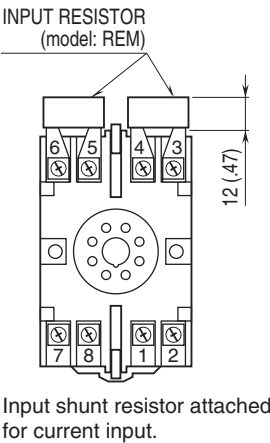

## SCHEMATIC CIRCUITRY &amp; CONNECTION DIAGRAM

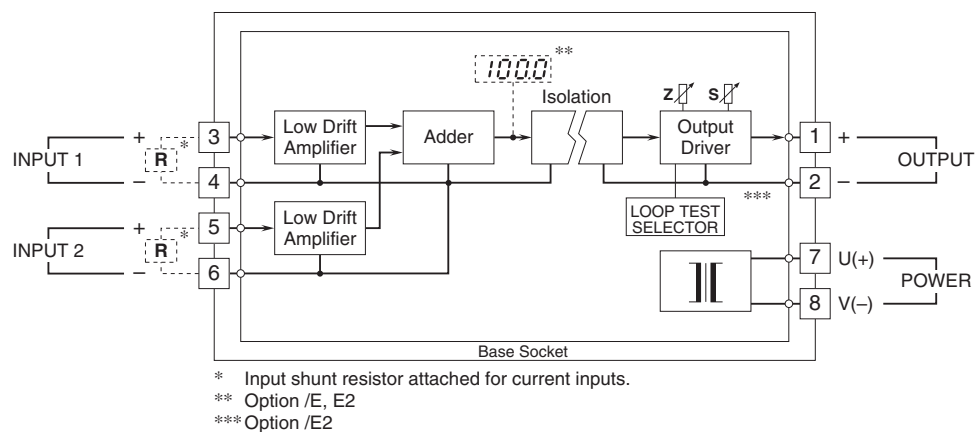

Specifications are subject to change without notice.