


## Remote I/O R3 Series

### 4 - 20 mA INPUT MODULE

(2-wire transmitter excitation supply; 8 points, non-isolated, connector type)

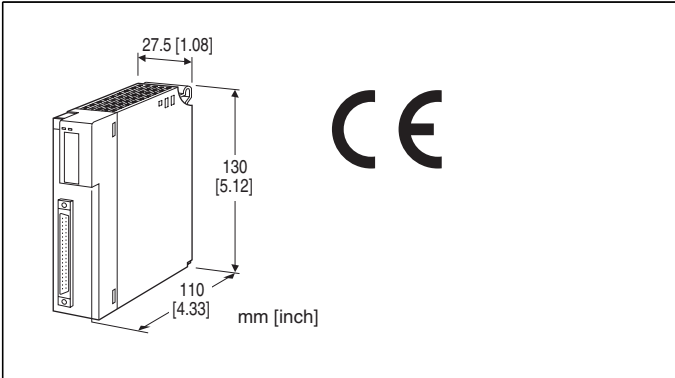

### MODEL: R3Y-DS8N[1][2]

#### ORDERING INFORMATION

- Code number: R3Y-DS8N[1][2]
- Specify a code from below for each of [1] and [2].  
(e.g. R3Y-DS8NW/CE/Q)
- Specify the specification for option code /Q  
(e.g. /C01/SET)

#### NO. OF CHANNELS

8: 8

#### ISOLATION

N: Non-isolated between inputs

#### [1] COMMUNICATION MODE

S: Single  
W: Dual

#### [2] OPTIONS (multiple selections)

##### Standards & Approvals

blank: Without CE  
/CE: CE marking

##### Other Options

blank: none  
/Q: With options (specify the specification)

#### SPECIFICATIONS OF OPTION: Q (multiple selections)

##### COATING (For the detail, refer to M-System's web site.)

/C01: Silicone coating  
/C02: Polyurethane coating

/C03: Rubber coating

#### EX-FACTORY SETTING

/SET: Preset according to the Ordering Information Sheet  
(No. ESU-8369)

#### RELATED PRODUCTS

- Connector terminal block (model: CNT)
- Special cable with 40-pin connector (model: FCN)

#### GENERAL SPECIFICATIONS

##### Connection

**Internal bus:** Via the Installation Base (model: R3-BSx)

**Input:** 40-pin connector (OTAX N365P040AU  
Fujitsu FCN-365P040-AU...discontinued))

**Internal power:** Via the Installation Base (model: R3-BSx)

**Isolation:** Input to internal bus or internal power

**Conversion rate:** Selectable with the side DIP SW

**RUN indicator:** Bi-color (red/green) LED;  
Red when the bus A operates normally;  
Green when the bus B operates normally;  
Amber when both buses operate normally.

**ERR indicator:** Bi-color (red/green) LED;  
Red with input circuit abnormality (AD converter response failure);  
Green in normal operating conditions.

#### SUPPLY OUTPUT

**Sensor excitation:** 24 V DC,  $\geq 300$  mA

- Shortcircuit Protection

**Current limited:** Approx. 30 mA per channel

**Protected time duration:** No limit

#### INPUT SPECIFICATIONS

■ DC Current: 4 - 20 mA DC

**Input resistance:** 250  $\Omega$  resistor incorporated

#### INSTALLATION

**Operating temperature:** -10 to +55°C (14 to 131°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Atmosphere:** No corrosive gas or heavy dust

**Mounting:** Installation Base (model: R3-BSx)

**Weight:** 160 g (0.35 lb)

#### PERFORMANCE

**Conversion accuracy:** Refer to the table at the end of this section.

**Conversion rate:** 160 / 80 / 40 / 20 msec. selectable  
(factory default: 160 msec.)

**Data range:** 0 - 10000

**Data allocation:** 8

**Current consumption:** 60 mA

**Temp. coefficient:**  $\pm 0.015\% / ^\circ\text{C}$  ( $\pm 0.008\% / ^\circ\text{F}$ )

**Response time:**  $\leq 0.2$  sec. (0 - 90 %)

**Insulation resistance:**  $\geq 100\ \text{M}\Omega$  with 500 V DC

**Dielectric strength:** 1500 V AC @ 1 minute

(input to internal bus or internal power)

2000 V AC @ 1 minute (power input to FG; isolated on the power supply module)

**Conversion accuracy**

RATE	160 msec.	80 msec.	40 msec.	20 msec.
ACCURACY	$\pm 0.05\%$	$\pm 0.1\%$	$\pm 0.2\%$	$\pm 0.4\%$

## STANDARDS & APPROVALS

**EU conformity:**

EMC Directive


EMI EN 61000-6-4

EMS EN 61000-6-2


RoHS Directive

## EXTERNAL VIEW


■ FRONT VIEW

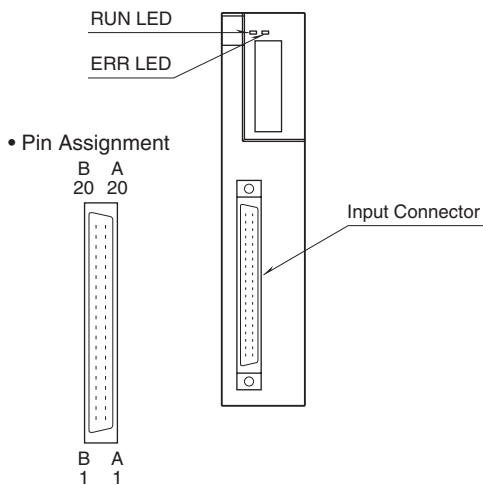


■ SIDE VIEW

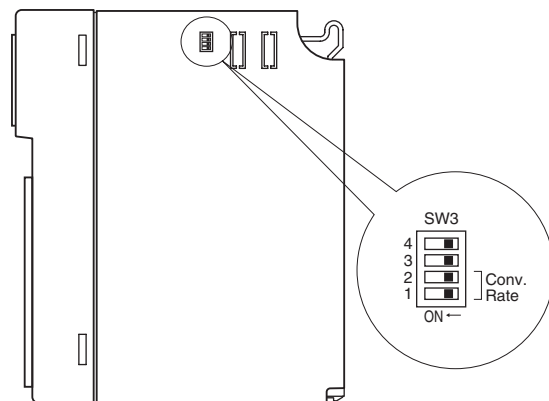

**EXTERNAL DIMENSIONS** unit: mm [inch]

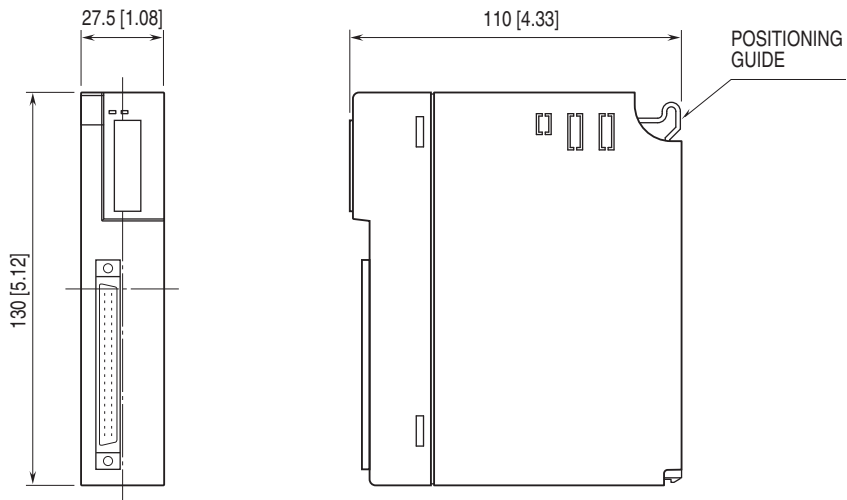

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

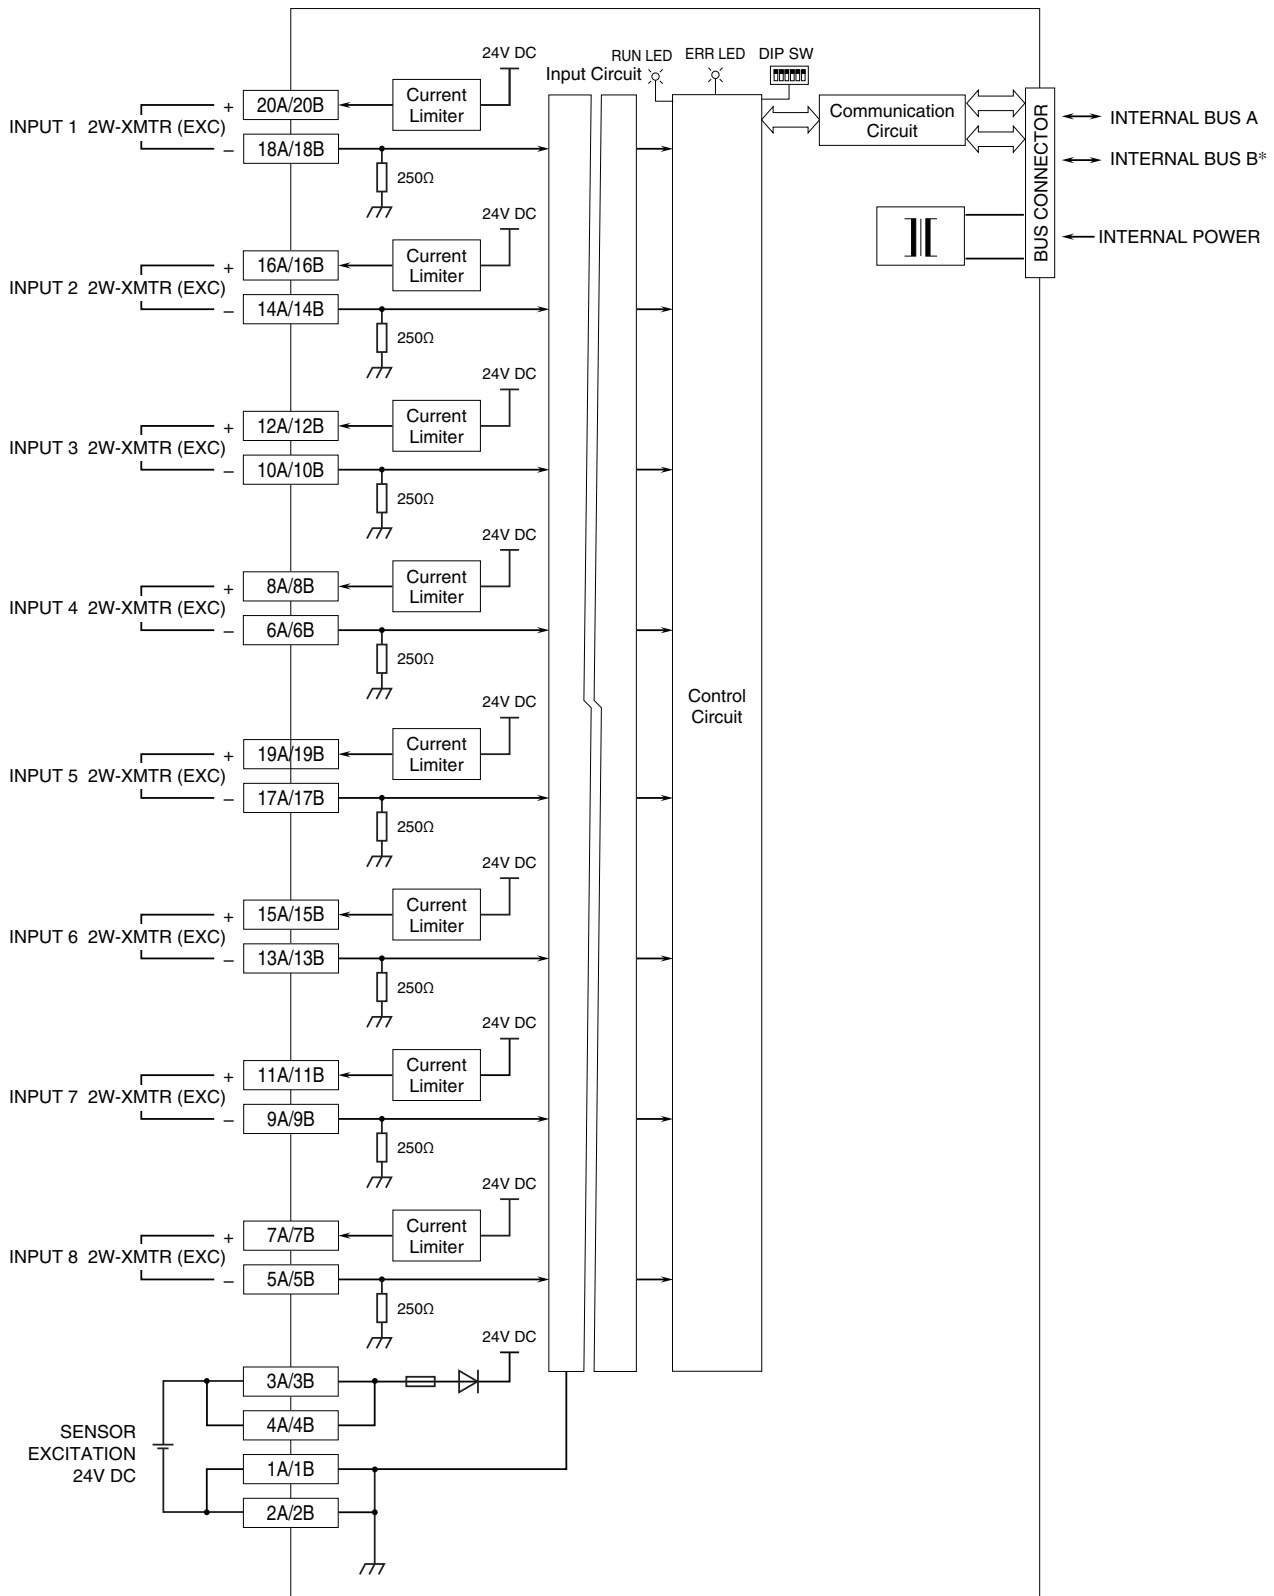

\*For dual redundant communication.

### Caution

Input value is less than -15% for the open input terminals, then the host PC/PLC recognizes and configures this as error. The unused channels can be specified and configured with the PC Configurator Software (model: R3CON).

**INPUT CONNECTOR (40-pin)**

PIN NO.	ASSIGNMENT	PIN NO.	ASSIGNMENT
1A	GND	1B	GND
2A	GND	2B	GND
3A	+24V	3B	+24V
4A	+24V	4B	+24V
5A	-IN8	5B	-IN8
6A	-IN4	6B	-IN4
7A	+IN8	7B	+IN8
8A	+IN4	8B	+IN4
9A	-IN7	9B	-IN7
10A	-IN3	10B	-IN3
11A	+IN7	11B	+IN7
12A	+IN3	12B	+IN3
13A	-IN6	13B	-IN6
14A	-IN2	14B	-IN2
15A	+IN6	15B	+IN6
16A	+IN2	16B	+IN2
17A	-IN5	17B	-IN5
18A	-IN1	18B	-IN1
19A	+IN5	19B	+IN5
20A	+IN1	20B	+IN1



Specifications are subject to change without notice.