

## Super-mini Signal Conditioners Mini-M Series

### CURRENT LOOP SUPPLY


(non-isolated)

#### Functions & Features

- Powers a 4 – 20 mA DC current loop
- Electrically isolating output signal from power input
- Shortcircuit protection
- Applicable to smart transmitters

#### Typical Applications

- Various 2-wire transmitters

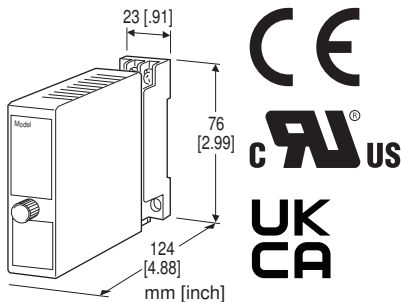

### MODEL: M2D-24-[1][2]

#### ORDERING INFORMATION

- Code number: M2D-24-[1][2]
- Specify a code from below for each of [1] and [2].  
(e.g. M2D-24-R/CE/Q)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

### SUPPLY OUTPUT

24: 24 V DC

### INPUT

#### Current

4 – 20 mA DC (Input resistance 250 Ω)

### OUTPUT 1

#### Voltage

1 – 5 V DC (Load resistance 250 kΩ min.)

### OUTPUT 2

#### Current

4 – 20 mA DC

### [1] POWER INPUT

#### AC Power

M: 85 – 264 V AC (Operational voltage range 85 – 264 V,

47 – 66 Hz)

(Select 'N' for 'Standards & Approvals' code.)

#### DC Power

R: 24 V DC

(Operational voltage range 24 V  $\pm$ 10 %, ripple 10 %p-p max.)

R2: 11 – 27 V DC

(Operational voltage range 11 – 27 V, ripple 10 %p-p max.)

(Select 'N' for 'Standards & Approvals' code.)

P: 110 V DC

(Operational voltage range 85 – 150 V, ripple 10 %p-p max.)

(Select 'N' for 'Standards & Approvals' code.)

### [2] OPTIONS (multiple selections)

#### Standards & Approvals (must be specified)

/N: Without CE, UKCA or UL

/CE: CE marking

/UK: CE, UKCA marking

/UL: UL approval, CE marking

#### Other Options

blank: none

/Q: Option other than the above (specify the specification)

#### SPECIFICATIONS OF OPTION: Q (multiple selections)

##### COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating (UL not available)

/C04: Polyolefin coating (UL not available)

##### TERMINAL SCREW MATERIAL

/S01: Stainless steel (UL not available)

#### GENERAL SPECIFICATIONS

Construction: Plug-in

Connection: M3 screw terminals (torque 0.8 N·m)

Screw terminal: Chromated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)

Isolation: Input or output to power

#### SUPPLY OUTPUT

Output voltage: 24 – 28 V DC with no load

Current rating:  $\leq$  22 mA DC

- Shortcircuit Protection

Current limited: 35 mA max.

Protected time duration: No limit

#### INPUT SPECIFICATIONS

- DC Current: Input resistor incorporated

## INSTALLATION

### Power Consumption

#### •AC:

Approx. 3 VA at 100 V

Approx. 4 VA at 200 V

Approx. 5 VA at 264 V

#### •DC: Approx. 3 W

**Operating temperature:** -5 to +55°C (23 to 131°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Surface or DIN rail

**Weight:** 150 g (0.33 lb)

## PERFORMANCE in percentage of span

**Accuracy:**  $\pm 0.1\%$  (accuracy of the receiving resistor)

**Temp. coefficient:**  $\pm 0.003\%/^{\circ}\text{C}$  ( $\pm 0.002\%/^{\circ}\text{F}$ ) (temp. coefficient of the receiving resistor)

**Line voltage effect to supply output:**  $\pm 3\%$  over voltage range

**Insulation resistance:**  $\geq 100\text{ M}\Omega$  with 500 V DC

**Dielectric strength:** 2000 V AC @1 minute (input or output to power to ground)

## STANDARDS & APPROVALS

### EU conformity:

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

RoHS Directive

### UK conformity (UKCA):

The UK legislations and designated standards are equivalent to the applicable EU directives.

(Refer to our website for more information about the legislations and designated standards.)

### Approval:

UL/C-UL nonincendive Class I, Division 2,


Groups A, B, C, and D

(UL 121201, CAN/CSA-C22.2 No.213-17)

UL/C-UL general safety requirements


(UL 61010-1, CAN/CSA-C22.2 No.61010-1-12)

## EXTERNAL DIMENSIONS unit: mm [inch]

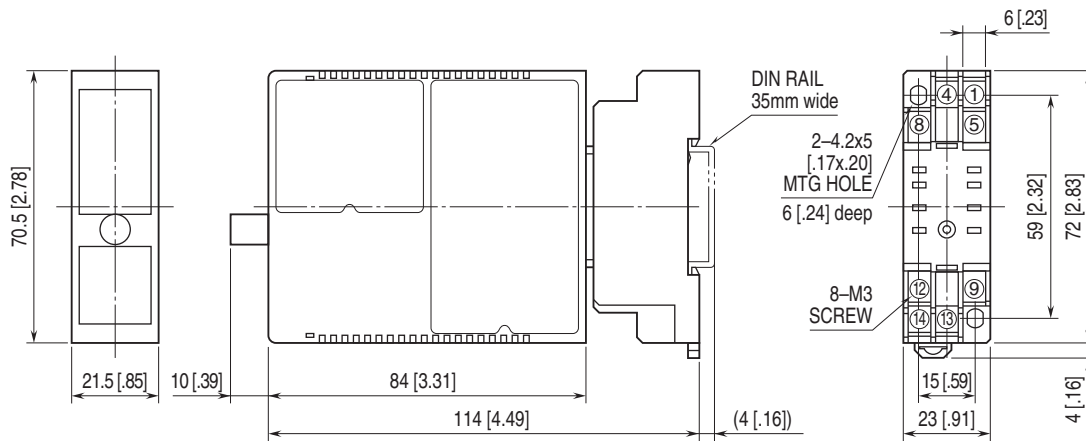


• When mounting, no extra space is needed between units.

## TERMINAL ASSIGNMENTS

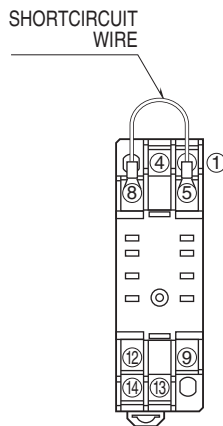

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

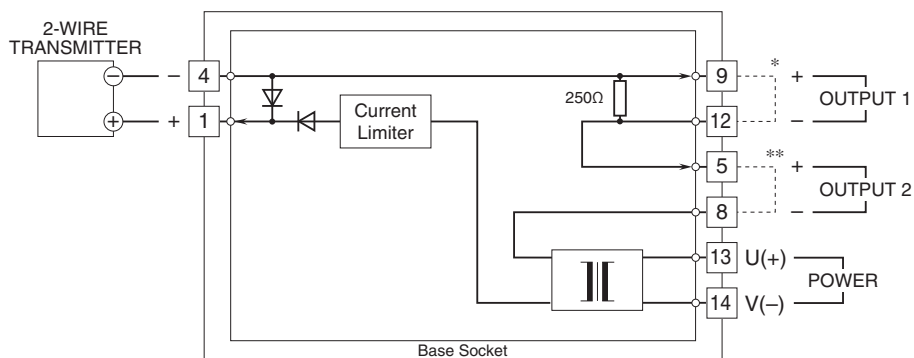

\* Short across these terminals for large voltage allowance at Output 2.

Be sure to match specifications of smart transmitter.

Do not connect a capacitive load to Output 1.

\*\*Short across these terminals when not using output 2.



Specifications are subject to change without notice.